






## Operating manual: ILD-210-SIR/EFP-OP Photoelectric Light Barrier

- Robust light barrier for industrial applications
- Alignment aid by 3-color LED at the rear side of the receiver


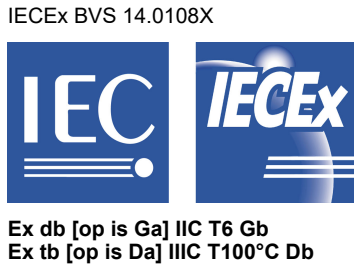


Technical Data	Type	ILD-210-SIR/EFP-OP	
Designation		Emitter: ILD-210-SIR-OP / Receiver: ILD-210-EFP-OP	
Gas Ex protection designation		II 2(1)G Ex db [op is Ga] IIC T6 Gb	
Dust Ex protection designation		II 2(1)D Ex tb [op is Da] IIIC T100°C Db	
For use in Ex Zones		Zones (0), 1, 2, (20), 21, 22	
Light Source		Infrared 870nm	
Measuring range		120m	
Min. recognizable object size		22mm (Avoid deflections on reflective surfaces)	
Maximum optical radiant power		<=5mW/mm <sup>2</sup>	
Maximum optical radiant intensity		< 15mW	
Optical aperture angle		Emitter: approx. 8° / Receiver: approx. 12°	
Response time		5ms	
Output type		push-pull, max. 100mA, short circuit protected	
Pollution degree		4, according to EN 60664-1:2007	
Supply voltage, Ue		24VDC ± 10%	
Absolute maximum supply voltage, Um		30VDC	
Current consumption		Emitter: 55mA / Receiver: 40mA	
Maximum power dissipation		Emitter: 1.93W / Receiver: 0.7W	
Power up delay time		500ms	
Housing		M30	
Pollution indication output "VA"		push-pull, max. 100mA, short circuit protected	
Enclosure rating		IP67	
Ambient working temperature range, T <sub>amb</sub>		-20°C up to +50°C	
Storage temperature range		-20°C up to +70°C	
Relative humidity		15% ... 90%, noncondensing	
Connection cable		TPU insulation, AWM 20236, 2/3/4+PE x 0.5mm <sup>2</sup> , halogen free, shielded, leads numbering marked, oil resistant cable for trailing, length: 10m	
Accessories		<b>Included</b>	<b>Optional</b>
		• 4x Nuts M30 (or 2x Clamps on request)	
Options		ILD-***-OP-S094: Special gluing of the lenses ILD-***-OP-S292: Special gluing of the lenses and potentiometer ILD-***-OP-S323: S094 + Housing M30, stainless steel 1.4404 ILD-***-SDI-OP: With emitter-disable input (DI) ILD-***-OP-S156 Working temperature range: -30°C up to 50°C ILD-***-OP-S299 Housing made of Stainless Steel 1.4404 (316) with special nuts 1.4404 ILD-***-OP-SM42 With special optics M42 Cable length: Up to 100m, on request	
Function and LED Indication		 Light beam interrupted LED shows red	 Light beam not interrupted LED shows yellow or green
Output circuitry			
Pollution indication output "VA"		Output VA = 0V (LED's shows red)	Output VA = 24V if LED's shows green
Alignment and Controlling by LED Display (At the rear side of the receiver).		<b>LED color</b>	<b>Meaning</b>
		red	light beam interrupted or not aligned
		yellow	polluted lenses or badly aligned
		green	light beam free and well aligned

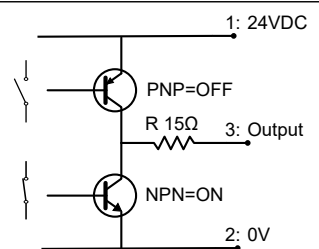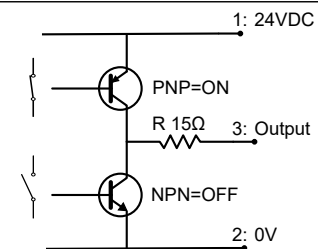ILD-210-SIR\_EFP-OP\_e1/2024-10-14/MP

EX related markings	<p>CE 1258          Typ: ILD-210-SIR/EFP-OP          Gas: II 2(1)G Ex db [op is Ga] IIC T6 Gb          ATEX:          IECEx:          Tamb:          Manufacturing date:</p>	<p>Manufacturer with Address          Electrical data according to table          Dust: II 2(1)D Ex tb [op is Da] IIC T100°C Db          BVS 10 ATEX E 130 X          IECEx BVS 14.0108X          -20°C up to +50°C          Number 5 to 8 of the Serial Number (Year / CW)</p>
---------------------	--	---

Wiring Diagram	Lead-No	ILD-210-SIR-OP	ILD-210-EFP-OP
	1	24VDC	24VDC
	2	0V	0V
	3	(Optional, SDI) DI	OUT
	4	-	VA
	white	Cable shield	Cable shield
	yellow-green	PE	PE

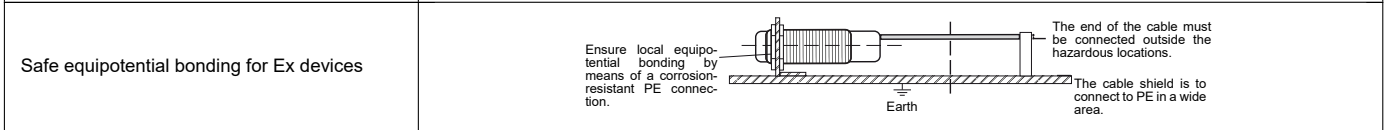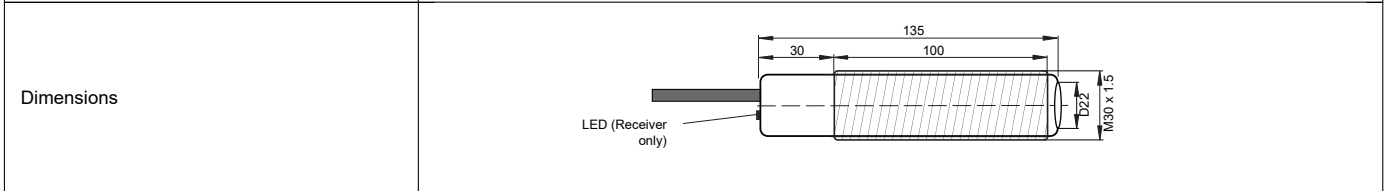

**Operating Manual / EC-/EU-declaration of conformity**

**Installation prescriptions for Ex hazardous locations**

General prescriptions for all Ex devices:  
 It is necessary to take into consideration the valid international and national rules and regulations (EN 60079-14). The maximum input voltage  $U_m = 30VDC$  must not be exceeded. The local equipotential bonding have to be done. The protective earth (PE) terminal is solid connected with the housing. The cable have to be protected against damages. The cable with termination fittings, or in cable tray systems and installed in a manner to avoid tensile stress at the termination fittings. To connect cables inside hazardous locations only use certificated Ex housings. All cable terminals must be connected outside hazardous locations. Use only original manufactured fibre optics and additional optical lenses, other additional optical lenses are not allowed in hazardous locations.  
 ILD-210-SIR/EFP-OP: Applicable in Ex zones 1, 2, 21 and 22. The limited optical radiation can operate into hazardous locations (0) and (20).

**General mounting prescriptions**

Do not exceed the maximum ratings. The electrical connections must be exactly as shown in the connection diagram. The cable shield should be connected to the protection earth, large-surfaced. Connection cables must not be installed parallel to high voltage cables. During electrical installation, the power must be disconnected from the device.

**General function**

The light barriers can be used e.g. for the detection of objects (bottles, cans, etc.) on a conveyor belt. This light barrier consists of a transmitter type ILD-210-SIR-OP and a receiver type ILD-210-EFP-OP. When both the transmitter and the receiver are correctly positioned and the light beam from the transmitter is not interrupted by an object, the receiver will show green on the indicator LED (rear and/or front) and the output is switched on. If the light beam is interrupted by an object, then the indicator LED (Rear and / or Front) shows red and the output is switched off.

**Function at standard connection of the supply voltage**

If the light beam is not interrupted the output of the receiver switches to ON (+24V). If the light beam is interrupted the output of the receiver switches to 0V. The load can be connected between the output and +24VDC or 0V.

**Function at inverse connection of the supply voltage**

If the light beam is not interrupted the output of the receiver switches to ON (0V). If the light beam is interrupted the output of the receiver switches to +24VDC. The load can be connected between the output and +24VDC or 0V.

**Pollution indication output "VA"**

Only when the receiver LED's shows green, the pollution indication output VA switches to +24VDC. (Light barrier well aligned, no pollution or no other impairments). If the receiver LED's shows yellow or red, the output VA is switched to 0V. This function gives the possibility to a fast reaction at polluted lenses.

**Arrangement of light barriers (IL\*...SDI-OP)**

If several light barriers are installed close to another, it is necessary to use light barrier emitters with the optional disable input. By using the disable input DI, each emitter can be controlled in a short reaction time. If only one emitter is activated in the same time, a mutual influence is precluded.

DI = 0V or not connected	emitter enabled
DI = High (24VDC)	emitter disabled

The Disable Input DI must be activated for  $\geq 15ms$ . The DI input is PNP compatible. The Emitter-Disable-Input DI can also be used for testing the associated receiver. By a short-time shut-off of the emitter, the switching off of the receiver output and with it the correct function of the receiver will be checked.

**Alignment of the Light Barrier**

1. Align transmitter with receiver.
2. The 3-color status display at the back of the receiver enables optimum alignment of the receiver. Align receiver so that the receiver LED shows "green". Look for the center of the green area. If the LED lights up yellow, the light barrier is not optimally aligned or the lenses are dirty.

**Maintenance**

No special maintenance is required. If the lenses becomes dirty, they should be cleaned with a non-aggressive solvents. Equipment must only be repaired by the manufacturer.

**General safety instructions**

The ILD-210-SIR/EFP-OP light barriers must not be used for accident protection. In the case of a malfunction, the output can have any state. During installation, operation and maintenance, it is mandatory to meet the relevant EU and national regulations and directives, especially with regard to explosion protection: EN 60079-14, Directives 1999/92/EC and 2014/34/EU.

**General notes, disposal**

We reserve the right to modify our products. Our products are designed in such a way, that it has the least possible adverse effect on the environment. It neither emits or contains any damaging or siliconized substances and use a minimum of energy and resources. No longer usable or irreparable units must be disposed of in accordance with local waste disposal regulations.

**Special usage conditions**

The widths and gaps of the flameproof joints of this apparatus are not identical with the respective minimum or maximum values required by Table 2 and 3 of IEC 60079-1:2014. Information on the dimensions are to be obtained from the manufacturer. Access to the enclosure is prevented by adhesion. Repair works of the enclosure and thus of the parts forming the flameproof joint can only be carried out by the manufacturer. The instructions contain relevant hints.

**EU-Declaration of Conformity**

The product meets the requirements of the following standards and directives: EN IEC 60079-0:2018, IEC 60079-1:2014, IEC 60079-15:2010, IEC 60079-28:2015, IEC 60079-31:2013, EN 60529:2014, EN 61000-4-2 to EN 61000-4-6, EN 61000-6-1/-2, EN 61000-6-4, ATEX directive 2014/34/EU, Machine directive 2006/42/EC, EMC directive 2014/30/EU, RoHS directive 2011/65/EU

**ATEX/IECEx-Designation:**

Gas: II 2(1)G Ex db [op is Ga] IIC T6 Gb  
 Dust: II 2(1)D Ex tb [op is Da] IIC T100°C Db  
 ATEX EU-type examination certificate No.: BVS 10 ATEX E 130 X  
 IECEx CoC No.: IECEx BVS 14.0108X  
 Ex CB IECEx: DEKRA Testing and Certification GmbH, Carl-Beyling-Haus, Dindenhalsstrasse 9, D-44809 Bochum, Ident number: 0158.

**ATEX certification of quality management system, type production of Ex devices, in accordance to the directive 2014/34/EU:**

Certification No.: SEV 21 ATEX 4580, QAR No.: CH/SEV/QAR21.0009/01, CB: Eurofins Electric & Electronic Product Testing AG, Luppenstrasse 3, CH-8320 Fehraltorf CE 1258.  
 Pablo Ledergerber, Matrix Elektronik AG, is authorized to generation of documentation.  
 The conformity of the devices with all used standards and directives and the EC-type examination certificate and the observation of the Quality Management System ISO 9001:2015, declares:

Ehrendingen, 14.10.2024

Pablo Ledergerber, Matrix Elektronik AG

ILD-210-SIR-EFP-OP\_e1/2024-10-14/MP

Matrix Elektronik AG (Manufacturer)  
 Kirchweg 24, CH-5420 Ehrendingen  
 Tel.: +41 56 20400-20, Fax -29  
 info@matrix-elektronik.com

Tippkemper-Matrix GmbH  
 Meegerer Str. 43, D-51491 Overath  
 Tel.: +49 2206 9566-0, Fax -19  
 info@tippkemper-matrix.de